


STEEL STRAPPING SYSTEM

CS1319 Sealless Combination Tool

Low cost upgraded seal-less strapping tool for heavy duty strapping
Made and Assembled in California USA.

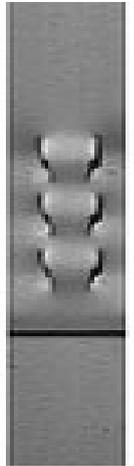

CS1319

Cyklop CS1319 is an enhanced version of MUL 20 for high tensile and regular duty steel strapping of thickness up to .027 inch or 0.70 mm. The CS1319 is adjustable for strap widths of 1/2", 5/8", and 3/4". Reversible dies ensure longevity of tool operation and reduces expensive maintenance with affordable replacement parts. Designed to minimize damage from accidental drops

Advantage and customer benefits

- Easiest sealless combination tool to operate, adjust and maintain
- Design based on 15 years of worldwide field use and feedback
- Triple-notch, highly efficient sealless joint
- Reversible dies for double life and 1/3 of the replacement cost
- Designed to minimize damage from accidental drops
- Lightweight and small footprint for universal operation
- Lifetime availability of parts and service
- User friendly



Technical data

Tension force	Up to 5,800 N
Package Type	Flat surface
Sealing	Triple-notch sealless joint
Strap width	1/2", 5/8", 3/4" (13, 16, 19 mm)
Strap thickness	Up to .027" or 0.70 mm
Strap quality	Regular or HT Steel straps
Weight	8.5 lbs or 3.8 Kg.

