

The new sophisticated and user friendly designed Semi-Automatic strapping machine with safety features!

SAFETY DESIGN ENSURES EASINESS TO USE

Once the strap is brought around the object and inserted into the guide, a beep sound indicates that the machine has started the tensioning. Even though the strap feeding becomes unstable, the strap feeding stops and prevents strap jamming with continuous beep sound. (Utility model patented)

SOPHISTICATED ROUND SHAPED BODY

The round shaped body compared to the previous machines ensures safe and comfortable operation.

LOW NOISE ENABLES USING IN THE OFFICE

The design that gives priority to noise problem achieves a great reduction of the noise. It is possible to use it at ease also in the office.

MICROCOMPUTER CONTROL

The reliability of the electric control has been greatly improved by adopting a microcomputer compared to the previous models.

HOUSEHOLD VOLTAGE

All machines are powered from a standard single-phase electrical socket, so it can be used without difficulty in any office and shop.



F20XE



F20XB

ADJUSTABLE TABLE HEIGHT (only F20XE)

F20XE is constructed so that the table height can be freely adjusted in three levels, 740mm, 760mm or 780mm. The operator can adjust the height to the most suitable level for any strapping work.


WIDE VARIETY OF STRAP

Strap ranging from 5mm – 15.5mm of width can be utilized without changing parts. Also, various kinds of straps, such as polypropylene, elastic, formed, etc can be utilized on F20XB and F20XE.

■ Standard Specifications

Name	Semi Automatic Strapping Machine
Model	F20XB (Box type), F20XE
Dimensions	F20XB : L760mm×W570mm×H740mm F20XE : L760mm×W570mm×H740,760,780mm
Weight	F20XB : approx. 68Kg F20XE : approx. 68Kg
Speed	2~3 seconds/cycle
Tension	Max. 490N (50Kgf)
Strap Width	Width 5mm ~ 15.5mm
Electrical requirements	Single phase 100V/120V/230V 50/60Hz
Electrical consumption	300W

■ Dimensions

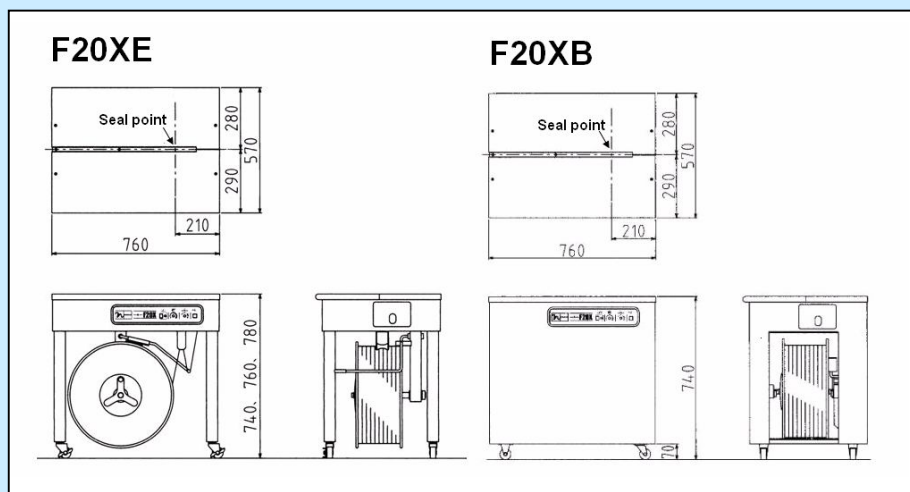

※Specifications and appearance are subject to change without notice.

DISTRIBUTED BY

EXPORTER:



SHIBAMOTO & CO., LTD.

1-12, MINATO 1-CHOME, CHUO-KU, TOKYO 104-0043, JAPAN

TEL : +81-3-3553-8307 FAX : +81-3-3552-4877

E-mail : export@shibamoto.jp

MANUFACTURER:



NAIGAI, LIMITED

1-12, MINATO 1-CHOME, CHUO-KU, TOKYO 104-0043, JAPAN

URL : <http://www.bandamatic.com>

Printed in Japan