




STRETCH FILM WRAPPER

MODEL: GL 201

Benefits	This machine is specially designed for handling pre-stretched wrapping film. The machine is easy to operate, with clear and simple button functions. Replacing the film roll is simple and fast. There are access points in the base of the turntable to allow internal transport with a forklift.	
Technical data		
Machine	Turntable speed	max. 12 rotations per minute, adjustable
	Ramp	3-way adjustable
	Electrical supply	230, 1-Phase, 50/ 60 Hz
	Power	0, 85 kW
	Electrical system & motor protection	IP 54
Machine function	- infinitely variable speed turntable - infinitely variable speed film carriage - number of adjustable upper and lower windings - Pallet height sensing - up and down winding - rainproof program - manually: - turntable speed - film carriage up and down	
Pallet load	Length/ Width, max.	800 x 1200 mm
	Pallet height	2100 mm
	Pallet weight	max. 1500 kg
Stretch film	Material	LLDPE (cyklopstretch)
	Width / diameter	500 mm / max. 250 mm
	Thickness	15 - 30 µm
	Core diameter	76 mm
Options	- Ramp - Film adapter for 50 mm - Mounting ring - Coreless adapter for film rolls - Weighing system - Roller conveyor (not motorized, rotating with locking device)	

Dimensions

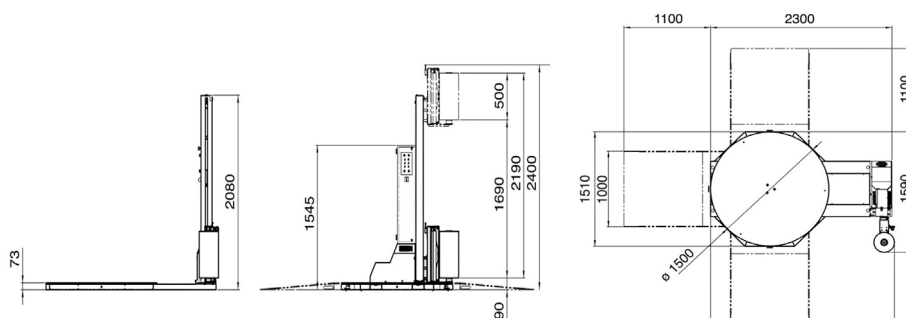

GL 201




GL 211-212



GL Robot



GL 215



GL 300



CTA 400

Subject to changes.
Version 10/2010

WWW.CYKLOP.CO.UK

DIRECT CONTACT: +44 1480 216777

Cyklop UK Limited
Unit 2, Generation Business Park
Barford Road
St. Neots, Cambridgeshire, PE19 6YQ
info@cyklop.co.uk

CYKLOP
INTERNATIONAL

THE
STRAPPING
COMPANY

100 YEARS
1912/2012